


PNEUMATIC STRAPPING TOOL FOR 13MM / 16MM / 19MM POLYPROPYLENE & POLYESTER STRAP

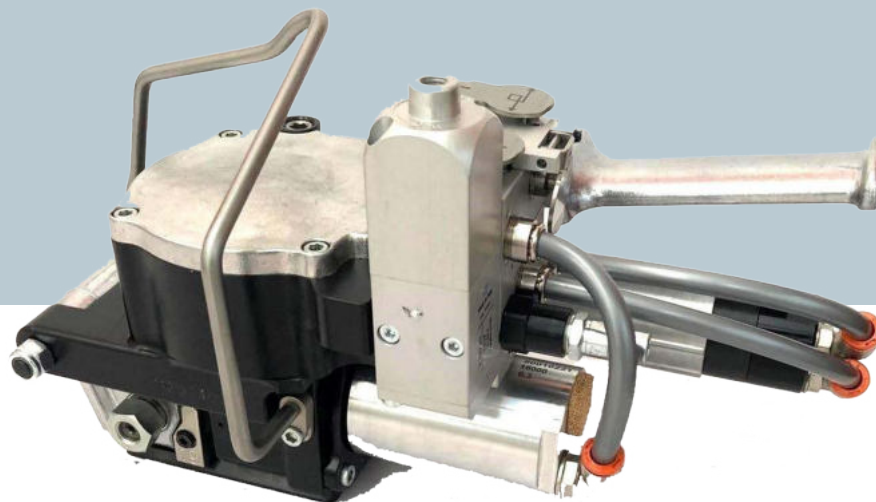

TECHNICAL SPECIFICATIONS

DIMENSION

Length	300 mm
Width	150 mm
Height	175 mm
Weight	5.6 kgs

POWER SUPPLY

Pressure range	4.5 -7 bar / 64 -99 psi
Air consumption	14 L/s - 29 cuft/min

PERFORMANCE

Max tension force	3500N -6.5bar-92psi
Tensioning speed	9mt/m
Sealing	Friction weld seal
Joint strenght	80% of breaking strenght*

* variable according to strap type

MODELS

CODE	DESCRIPTION	STRAP	THICKNESS
T111323	ITI11 for 13 mm plastic strap 3500N with Friction	13/16/19 MM PET strap	0,7mm - 1,4mm (13mm) 0,7mm - 1,2mm (16/19mm)
T119923	ITI11 - for 16 mm /19 mm plastic strap -3500N	13/16/19 MM PET strap	0,7mm - 1,4mm (13mm) 0,7mm - 1,2mm (16/19mm)



POLYESTER STRAP



POLYESTER STRAP



POLYPROPYLENE STRAP

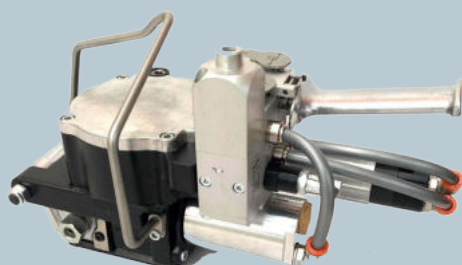

ITIPACK s.r.l.
Via Capovilla, 73/bis - 36030 - VILLAVERLA (Vicenza) Italy
Phone. +39 0445 855 977 r.a. - Fax +39 0445
350034 E-mail : info@itipack.it - Web:
www.itipack.com