


PNEUMATIC STRAPPING TOOL FOR 13MM / 16MM / 19MM POLYPROPYLENE & POLYESTER STRAP

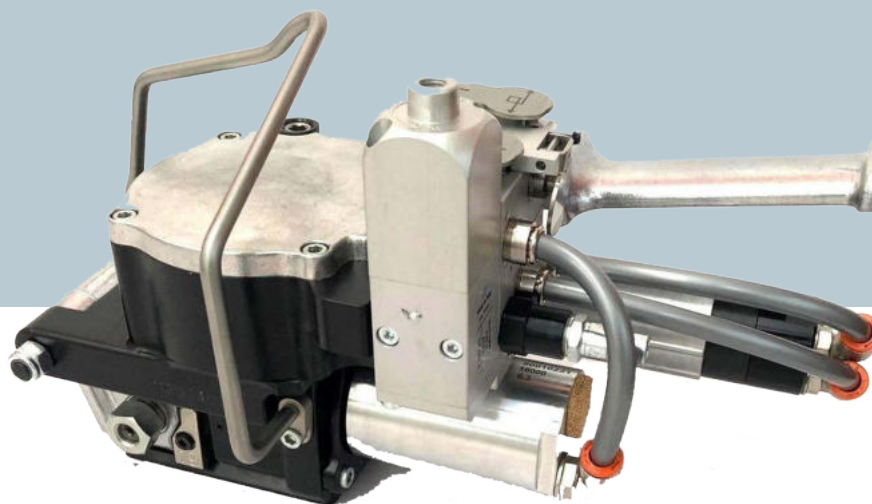

TECHNICAL SPECIFICATIONS

DIMENSION

Length	300 mm
Width	150 mm
Height	175 mm
Weight	5.6 kgs

POWER SUPPLY

Pressure range	4.5 -7 bar / 64 -99 psi
Air consumption	14 L/s - 29 cuft/min

PERFORMANCE

Max tension force	6000N -6.5bar-92psi
Tensioning speed	9mt/m
Sealing	Friction weld seal
Joint strenght	75% of breaking strenght*

* variable according to strap type

MODELS

CODE	DESCRIPTION	STRAP	THICKNESS
T129933	ITI12 for 16/19 MM PET/ polypropylene strap 5000N	16/19 MM PET/polypropylene strap	1,0mm - 1,4mm
T129953	ITI11 - for 19 MM PET/ polypropylene strap 3/4" -6000N	19 MM PET/polypropylene strap	1,0mm - 1,4mm



POLYESTER STRAP



POLYESTER STRAP



POLYPROPYLENE STRAP

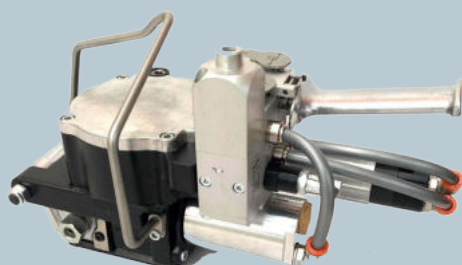

ITIPACK s.r.l.
Via Capovilla, 73/bis - 36030 - VILLAVIERLA (Vicenza) Italy
Phone. +39 0445 855 977 r.a. - Fax +39 0445
350034 E-mail : info@itipack.it - Web:
www.itipack.com