


PNEUMATIC STRAPPING TOOL FOR 25MM / 32MM PET STRAP

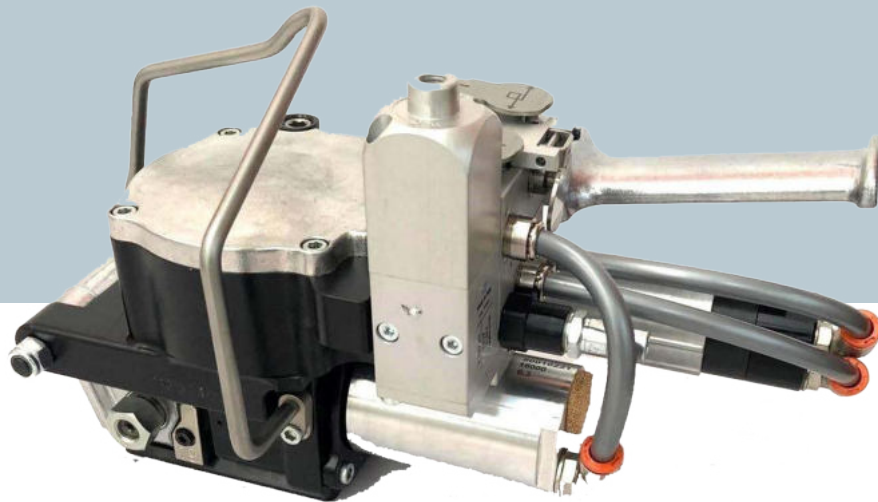

| TECHNICAL SPECIFICATIONS | |
|--------------------------|---------------------------|
| DIMENSION | |
| Length | 300 mm |
| Width | 160 mm |
| Height | 175 mm |
| Weight | 5.8 kgs |
| POWER SUPPLY | |
| Pressure range | 6 -7 bar / 87-99 psi |
| Air consumption | 14 L/s - 29 cuft/min |
| PERFORMANCE | |
| Max tension force | 5800N -6.5bar-92psi |
| Tensioning speed | 9mt/m |
| Sealing | Friction weld seal |
| Joint strenght | 75% of breaking strenght* |

* variable according to strap type

| MODELS | | | |
|---------|-------------------------------|--------------------|----------------|
| CODE | DESCRIPTION | STRAP | THICKNESS |
| T149953 | ITI14 for 25/32 MM PET/ 5800N | 25/32 MM PET strap | 0,8mm - 1,27mm |



POLYESTER STRAP



POLYESTER STRAP



POLYPROPYLENE STRAP

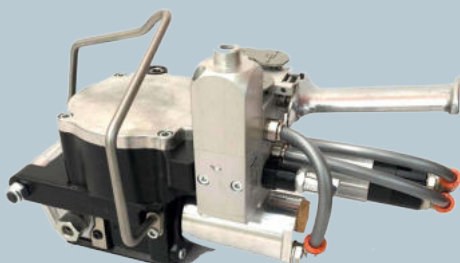

ITIPACK s.r.l.
 Via Capovilla, 73/bis - 36030 - VILLAVERLA (Vicenza) Italy
 Phone. +39 0445 855 977 r.a. - Fax +39 0445
 350034 E-mail : info@itipack.it - Web:
 www.itipack.com